



## NEW Hazardous Duty Valves


*Continental Hydraulics* now offers hazardous duty solenoid valves in an on-off version, along with hazardous duty proportional valves.

**P<sub>max</sub>** 5000 PSI / 350 Bar  
**Q<sub>max</sub>** up to 290 GPM / 1100 LPM

This product meets with ATEX 94/9/EC standards, and suitable for the use in potentially explosive atmospheres, that fall within the ATEX II 2GD **either for gas or for dust classification**.

These valves are available as direct operated type D03 size, and in pilot operated configurations for High Flow Requirements, D05H, D07, D08 and D10 Sizes.

The D03 valves are supplied with a **zinc-nickel finishing surface treatment**, suitable to ensure a salt spray resistance up to 370 h (test operated according to UNI EN ISO 9227 standards and test evaluation operated according to UNI EN ISO 10289 standards); for Pilot Operated valves, this treatment is available upon request.

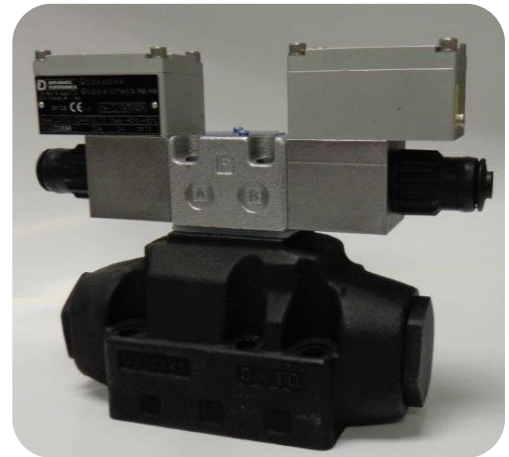

### Features

- Easy access Wiring Terminal
- Mount on standard spacing D03 manifolds
- Top Cable Entry Options: M20 x 1.5 / Gk ½-UNI / ½" NPT
- Side Cable Entry Options: M16 x 1.5 / M20 x 1.5
- Bidirectional surge suppression in potted electronics is standard
- IP 66 / 68

[View the catalog PDF](#)

