

Swing cylinders - Collet-Lok® design


Shown: WPTR-100V, WPFR-100V



WP series

Enerpac Collet-Lok® cylinders are designed to mechanically hold the workpiece after hydraulic pressure is removed. Clamping capacities range from 1000 lbs. to 8500 lbs.

SAE oil connection

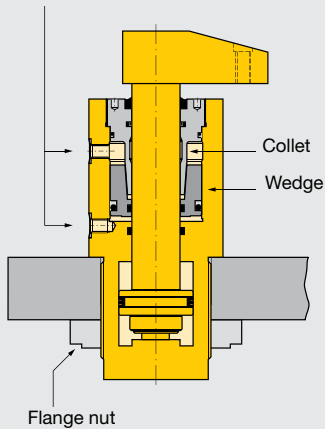

Hydraulic pressure pushes the collet up a wedge, locking the plunger in the clamping position.

■ Lower flange Collet-Lok® swing cylinder mounted on a pallet.



Ideal when live hydraulics are not available

- Double acting Collet-Lok® action allows fully automated operation
- Additional level of safety since live hydraulics are not required to maintain clamping force
- Collet-Lok® swing cylinders can be mounted by the flange or threaded into the fixture. Flanged models have manifold ports and tubing ports.
- Viton seals are standard

Selection chart

Clamping force ¹⁾	Stroke		Left turning	Right turning	Cylinder effective area		Oil capacity		Max. oil flow ¹⁾	Standard clamp arm
	lbs	Clamp	in	90°	in ²	in ³	in ²	in ³	in ³ /min	Sold separately
▼ Lower flange										
			Model number							
1000	.32	.95	WPFL-50V	WPFR-50V	.25	.71	.24	.67	122	CA-540
2000	.47	1.11	WPFL-100V	WPFR-100V	.50	1.11	.55	1.22	305	CA-1050
8500	.39	1.65	WPFL-300V*	WPFR-300V*	2.05	3.45	3.40	5.70	600	CA-3070
▼ Threaded body										
			Model number							
2000	.47	1.11	WPTL-100V	WPTR-100V	.50	1.11	.55	1.22	305	CA-1050
8500	.39	1.65	WPTL-300V*	WPTR-300V*	2.05	3.45	3.40	5.70	600	CA-3070

¹⁾ Using standard clamp arm. Clamp arms are sold separately (L14).

Note: - Call Enerpac for models with metric thread and BSPP port connections.
- Minimum working pressure for Collet-Lok® system is 1400 psi.

* This product is made to order. Please contact Enerpac for delivery information before specifying in your design.

Collet-Lok® sequence

Step 1
Pressurize port #1.
Plunger turns 90° and clamps part.

Step 2
Keep port #1 pressurized.
Pressurize port #2.
Plunger will be locked in clamped position.

Step 3
Depressurize port #1 and #2.
Uncouple cylinder from hydraulic power source.
Part will be held in place.

Step 4
Pressurize port #3.
Plunger will be unlocked and the clamp force released.

Step 5
Keep port #3 pressurized.
Pressurize port #4.
Plunger will extend and turn to its original position.

Product dimensions in inches []

Left turning models*	A	B	C	C1	D	D1	F	H1	H2	H3
					Ø	Ø	Ø			
▼ Lower flange										
WPFL-50V	7.92	6.97	6.74	0.98	2.28	3.35	0.75	0.39	0.49	—
WPFL-100V	8.77	7.67	6.48	0.98	2.68	3.94	0.88	0.39	0.49	—
WPFL-300V	12.67	11.02	10.82	0.98	3.53	5.19	1.38	0.43	0.49	—
▼ Threaded body										
WPTL-100V	8.39	7.28	4.78	3.56	1.875-16 UN	2.76	0.88	1.24	2.64	2.97
WPTL-300V	12.22	10.57	6.46	4.53	3.125-16 UN	3.66	1.38	1.5	3.62	3.96

Note: Dimensions shown with standard clamp arm.

* For nonrotational model replace "L" with "N". Example: WPFN-100V


Installation dimensions in inches

Clamping force ¹⁾ lbs	Fixture hole Ø D3	Mounting thread J mm	Minimum depth J2
▼ Lower flange			
1000	2.301 ±.012	M6 x 1,00	.68
2000	2.701 ±.012	M8 x 1,25	.72
8500	3.565 ±.012	M10 x 1,50	.72
Clamping force ¹⁾ lbs	Fixture hole Ø D3	Mounting flange Sold separately 87 ▶	Mounting nut Sold separately 86 ▶

▼ Threaded body



2000	1.875-16 un	MF-481	FN-481
8500	3.125-16 un	MF-801	FN-801

¹⁾ With standard clamp arm.

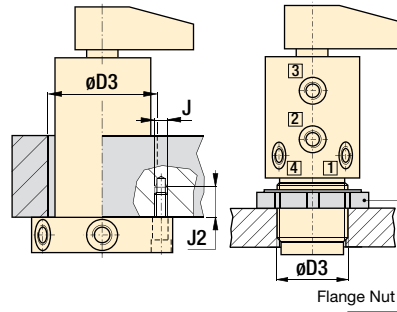

Oil port functions

- 1 90° Rotation and clamp
- 2 Locks system
- 3 Unlocks system
- 4 Unclamp and 90° rotation

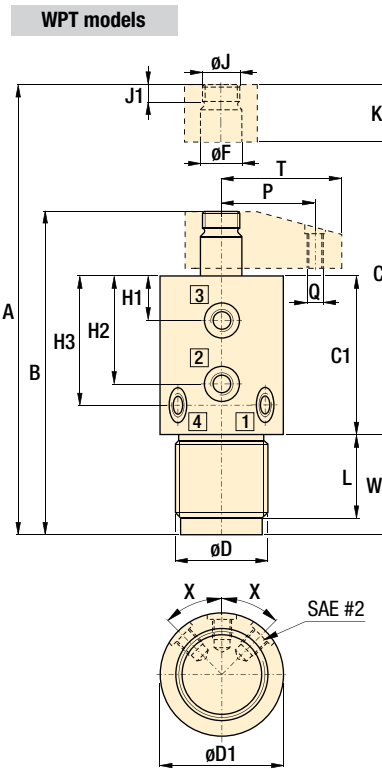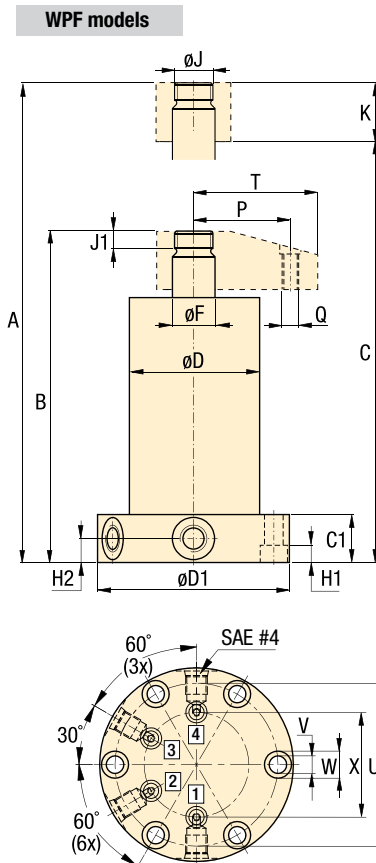

X = 45° WPT-100 models
X = 30° WPT-300 models


J	J1	K	L	P	Q	T	U	V	W	X	Right turning models
Ø					Ø		Ø	Ø	Ø	lbs	
Lower flange ▼											
.625-18 UNF	0.31	1.18	-	1.57	.313-24 UNF	2.13	2.76	0.35	0.55	1.89	WPFR-50V *
.750-16 UNF	0.35	1.18	-	1.97	.375-24 UNF	2.52	3.31	0.35	0.55	2.13	WPFR-100V*
1.250-12 UNF	0.39	1.85	-	2.76	.625-18 UNF	3.66	4.41	0.43	0.67	26.5	WPFR-300V*
Threaded body ▼											
.750-16 UNF	0.35	1.18	1.63	1.97	.375-24 UNF	2.52	-	-	2.44	-	WPTR-100*
1.250-12 UNF	0.39	1.85	3.35	2.76	.625-18 UNF	3.66	-	-	3.92	-	WPTR-300*

Force: 1000 - 8500 lbs

Stroke: .94 - 1.65 inch


Pressure: 1400 - 5000 psi

- E Cilindros giratorios
- F Vérins de bridage pivotants
- D Schwenkspannzylinder



Custom Options Available

Intermediate capacities
Different flange locations

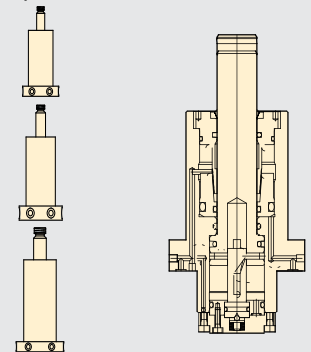

Flexible Machining Systems
See Yellow Pages (224)

Options

Clamp arms

14 ▶



Collet-Lok® work supports

16 ▶



Sequence valves

152 ▶



Accessories

86 ▶



Important

Minimum unlock pressure must be at least 1500 psi above lock pressure.

Swing cylinders, CA Series *Dimensions & options*

Force: 1000 - 8500 lbs

Stroke: 500 - 5000 psi

- E** Brazos de amarre
- F** Bras de bridage
- D** Spannarme

Options

Gauges

190 ▶



Flow control valves

155 ▶



Sequence valves


152 ▶



Important

Do not exceed maximum oil flow.

If flow rates are exceeded, swing cylinder indexing mechanism may be permanently damaged.




When designing custom clamp arms, the flow rates must be further reduced. This rating should be in proportion to the mass and the center of gravity of the clamp arm.

Example:

If the mass of the arm is twice that of the long arm, flow rates must be reduced by 50%.

CA models Standard clamp arms for Collet-Lok® swing clamps

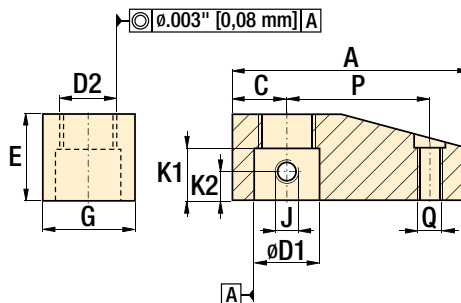

Product dimensions in inches []

Clamp force lbs	Model number	A	C	D1 Ø	D2 UNF	E	G	J UNF	K1	K2	P	Q UNF	lbs
▼ Standard clamp arms for Collet-Lok® swing clamps													
1000	CA-540	2.94	.71	.749-.750	.625-18	1.18	1.26	.313-24	.75	.39	1.57	.313-24	1.2
2000	CA-1050	3.27	.75	.878-.879	.75-16	1.18	1.38	.313-24	.71	.39	1.97	.375-24	1.2
8500	CA-3070	5.04	1.38	1.377-1.378	1.25-12	1.85	2.32	.313-24	1.26	.67	2.76	.625-18	5.0

Special configurations are available


Model: MPFL100PE001-S

Body style: Upper flange

Clamp capacity: 2000 lbs (9 kN)

Clamping stroke: .71 in. (18 mm)

Special feature: Position sensing

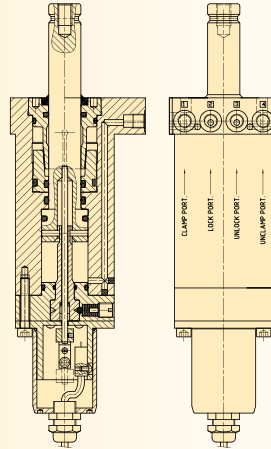


Model: MPFN300VE002

Body style: Lower flange

Clamp capacity: 8800 lbs (39 kN)

Clamping stroke (straight):
2.25 in. (57,4 mm)

Special feature: Viton seals
Long stroke

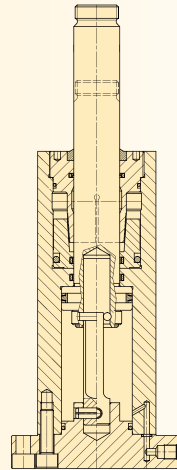


Model: MPFL200VE100

Body style: Mid-body flange

Clamp capacity: 3900 lbs (20 kN)

Clamping stroke (left hand):
2.50 in. (63,5 mm)

Special feature: Viton seals
Long stroke
Mid-flange body

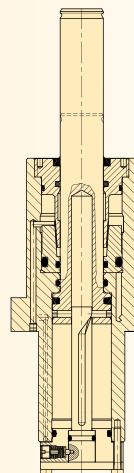

Special features for Swing Cylinders*

Enerpac can design Collet-Lok® cylinders with special features to meet the needs of your production fixtures:

- Special mounting
- Special manifold port location
- Longer stroke
- Special rotation
- Internal clutch to protect rotation mechanism
- Viton seals
- Special rod end
- Position sensing

*Special features also available for Collet-Lok® Push Cylinders and Work Supports.

Work supports - Collet-Lok® design


Shown: WPFS-100, WPTS-100

Collet-Lok®
products



WP series

Enerpac work supports provide either additional non-fixed location points to the clamps, or support to larger or thin section workpiece components, always in order to minimize workpiece deflection during machining. The Collet-Lok® design does not require hydraulic system pressure to maintain support position.

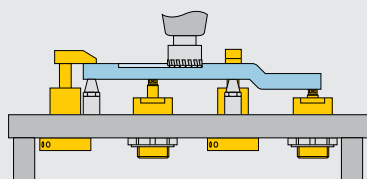


■ While pallet No. 1 is in the machine, a new work piece is loaded on to pallet No. 2.



Hydraulically locked, mechanically maintained work support

- Collet-Lok® design allows the work support to maintain support position after the hydraulic pressure is removed
- Collet-Lok® maintains a higher level of safety, as it is not dependent on hydraulic supply pressure
- Low deflection: lowest deflection of any work support available
- Threaded or flanged body increases mounting flexibility
- Capacities up to 10,000 lbs available

Collet-Lok® sequence

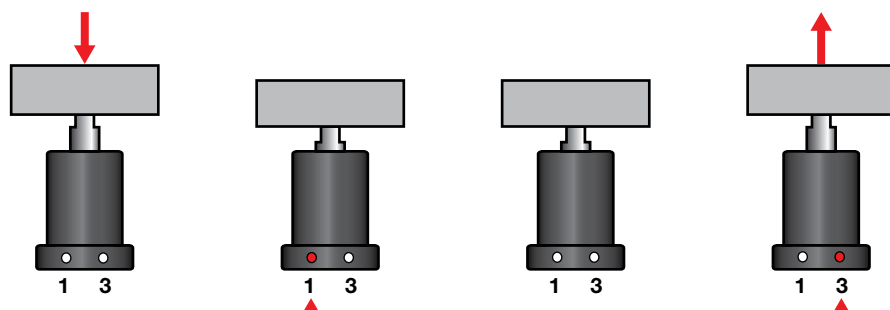

Step 1

Install the workpiece on the support cylinder. The plunger position will adjust to the contour of the workpiece.

Step 2

Pressurize oil port #1. The plunger will be locked in the supporting position.

Step 3

Depressurize oil port #1. Cylinder can be uncoupled from hydraulics and still support the workpiece.


Step 4

Pressurize oil port #3. The plunger will be unlocked. When the workpiece is removed, plunger will extend into its original position.

Mounting style


WPT series, Threaded mount

Threaded body can be used with a threaded hole in fixture plate or a jam nut with a bored hole. Ports are located in top collar block.





WPF series, Flange models

Mounts directly to fixture plate. Offers the flexibility of side ports or manifold ports on the underside of the flange.




Product selection

Max. support force	Support plunger stroke	Flange models	Threaded models	Operating pressure		Locking system displacement		Plunger contact spring force	Max. oil flow
				min.	max.	lock	unlock		
lbs	in				psi		in ³ /min	lbs	in ³ /min
2000	0.39	WPFS-100V	-	1450	5000	0.24	0.24	4.50	400
4000	0.39	WPFS-200V	-	1450	5000	0.37	0.37	7.90	400
10,000	0.77	WPFS-450V	-	1450	5000	1.10	1.10	67.50	400
2000	0.39	-	WPTS-100V	1450	5000	0.24	0.24	3.37	400
4000	0.39	-	WPTS-200V	1450	5000	0.37	0.37	6.74	400

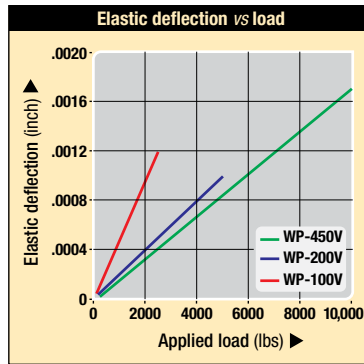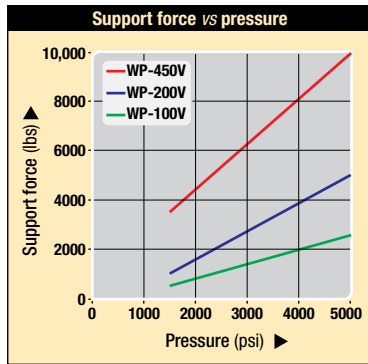

Deflection chart:

Elastic deformation of the work support resulting from the application of load.



Force: 2000 - 4000 lbs


Stroke: 0.39 - .77 inch

Pressure: 1450 - 5000 psi

E Cilindros de soporte

F Vérin anti-vibreur

D Abstützzylinder



Options

Collet-Lok®
swing cylinders

12 ▶



Auto couplers

174 ▶



Positive clamping cylinders

80 ▶



Sequence valves


152 ▶



Important


WARNING!

Support force and clamping force must be matched. Support force should be at least 150% of clamping force.




For proper application, clamp force, pressures and timing, consult Enerpac for support.


WPFS-100V, -200V

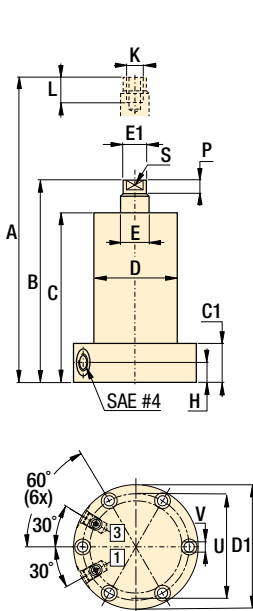

WPFS-450V

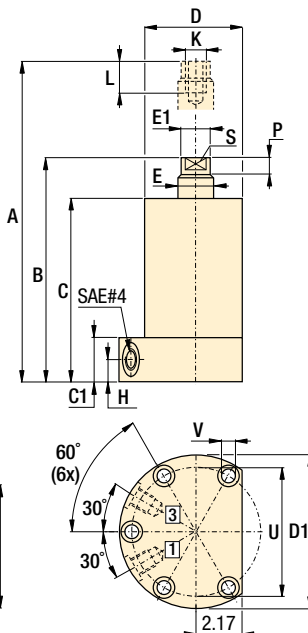

WPTS-100V, -200V

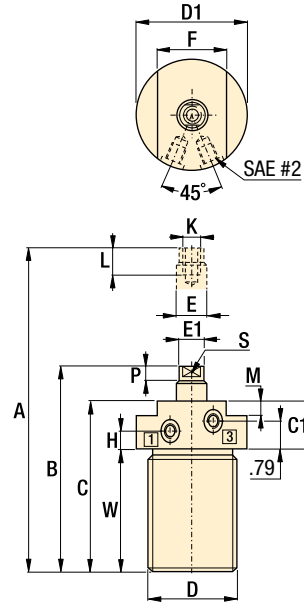

Product dimensions in inches []

Model number	A	B	C	C1	D	D1	E	E1	F	H	K	L	M	P	S	U	V	W	X	lbs
							Ø	Ø	Ø		UNF					Ø	Ø		Ø	
▼ Flange models																				
WPFS-100V	4.88	4.49	4.17	0.98	Ø 2.99	4.33	0.62	0.55	—	0.49	.313-24	0.59	—	0.2	Ø.11*	3.7	0.35	—	3.21	8.8
WPFS-200V	4.96	4.56	4.17	0.98	Ø 3.62	5.12	0.98	0.91	—	0.49	.500-20	0.79	—	0.2	Ø.11*	4.41	0.35	—	3.82	13.2
WPFS-450V	7.61	6.84	6.34	0.98	Ø 5.12	6.49	1.97	1.89	—	0.49	.750-16	1.18	—	0.39	1.18**	5.79	0.43	—	4.92	35.2
▼ Threaded models																				
WPTS-100V	4.84	4.45	4.13	1.50	2.375-12	2.94	0.62	0.55	2.17	0.61	.313-24	0.59	0.79	0.20	Ø.11*	—	—	2.64	—	6.6
WPTS-200V	4.92	4.53	4.13	1.50	3.125-16	3.73	0.98	0.91	2.76	0.61	.500-20	0.79	0.79	0.26	Ø.11*	—	—	2.64	—	8.8

* Spanner holes (x 2)

** Wrench Flats

www.enerpacwh.com

Push cylinders - Collet-Lok® design

Shown: WPTC-110, WPFC-210


Collet-Lok®
products



WP series

Collet-Lok® positive locking push cylinders are designed to mechanically hold the workpiece after hydraulic pressure is removed.

Push capacities range from 2500 lbs. to 5000 lbs.

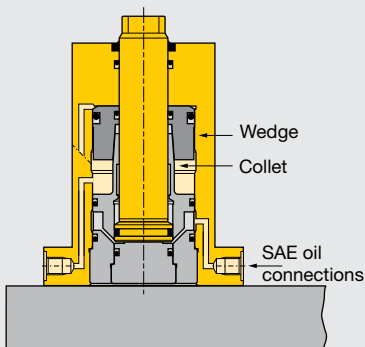

Hydraulic pressure pushes the collet up a wedge, locking the plunger in the clamping position.

■ Lower flange Collet-Lok® push cylinder used for positioning a motorcycle frame.



Ideal when live hydraulics are not available

...clamping is sustained mechanically so live hydraulics are not required during the machining cycle

- Double-acting Collet-Lok® action allows fully automated operation
- Additional level of safety since live hydraulics are not required
- Collet-Lok® push cylinders can either be mounted by the flange, or threaded into the fixture
- The Collet-Lok® design is an industry exclusive
- Capacities up to 8800 lbs. available on request

Collet-Lok® sequence



Step 1

Pressurize port #1. Plunger extends and clamps workpiece.



Step 2

Keep port #1 pressurized. Pressurize port #2. Plunger will be locked in clamped position.



Step 3

Depressurize port #1 and #2. Cylinder should now be uncoupled from hydraulic power source and will maintain the clamped position.



Step 4

Pressurize port #3. Plunger will be unlocked and the plunger will be released to its original position.

Product selection

Max. push force	Hydr. plunger stroke	Lower flange	Threaded body	Operating pressure		Hydraulic effective area		Oil capacity		Max. oil flow
				min.	max.	psi adv.	adv.	in ² unlock	retr.	
lbs	in									in ³ /min
Model number										
2500	.60	WPFC-110V	WPTC-110V	725	5000	.50	.30	.37	.24	600
5000	.60	WPFC-210V	WPTC-210V	725	5000	.99	.61	.61	.37	600

Maximum cycle rate: 8 cycles/min.

Note: Call Enerpac to order models with metric thread and BSPP port connections.



Capacities up to 8800 lbs. available on request.

Dimensions in inches []



Model number	A	B	C	C1	D	D1	D2	E	E1	F
						Ø		Ø	Ø	Ø
▼ Lower flange										
WPFC-110V	6.09	5.49	5.16	-	Ø 2.76	3.94	-	0.62	0.59	-
WPFC-210V	6.80	6.20	5.87	-	Ø 3.07	4.33	-	0.87	0.79	-
▼ Threaded body										
WPTC-110V	6.05	5.45	5.12	0.74	2.375-12 UN	2.52	1.500-12 UNF	0.62	0.59	1.81
WPTC-210V	6.76	6.16	5.83	0.71	2.750-16 UN	2.91	1.875-16 UN	0.87	0.79	2.17

Installation dimensions in inches

Push force lbs	Fixture hole øD3	Mounting thread J	Minimum depth J2
▼ Lower flange			
2500	2.79	M6	.68
5000	3.10	M8	.72
▼ Threaded body			
2500	2.375-12 UN	-	-
5000	2.750-16 UN	-	-

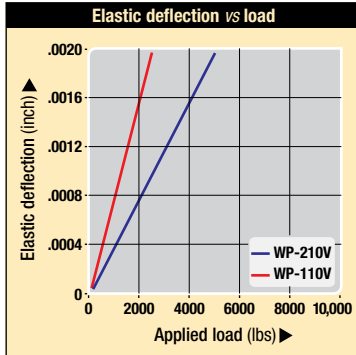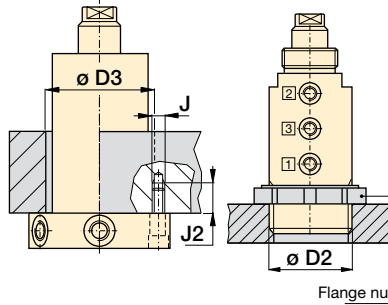


Deflection chart:
Elastic deformation of the plunger resulting from the application of load.

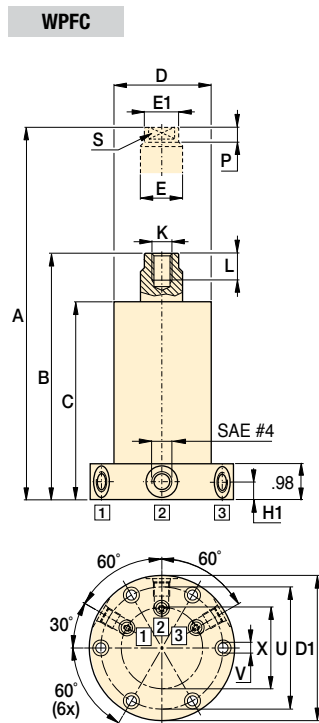

Oil port functions

- 1 Clamp
- 2 Lock
- 3 Unlock/Retract

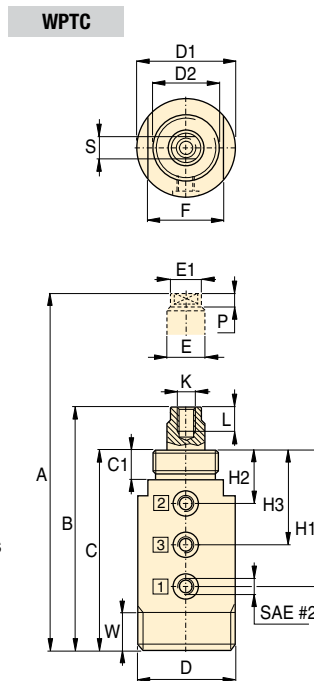

H1	H2	H3	K	L	P	S*	U	V	W	X	lbs	Model number
Lower flange ▼												
0.49	-	-	.313-24 UNF	0.59	0.24	Ø .11*	3.31	0.28	-	2.21	8.8	WPFC-110V
0.49	-	-	.375-24 UNF	0.79	0.2	Ø .11*	3.7	0.35	-	2.76	11.0	WPFC-210V
Threaded body ▼												
3.78	1.30	2.56	.313-24 UNF	0.59	0.24	Ø .11*	-	-	0.75	-	6.6	WPTC-110V
4.37	1.26	2.83	.375-24 UNF	0.79	0.20	Ø .11*	-	-	0.79	-	7.5	WPTC-210V


* Spanner holes (x 2)

Push force: 2500-5000 lbs

Stroke: .60 inch

Pressure: 725-5000 psi



- E** Cilindros de empuje
- F** Vérins pousseurs
- D** Gesichterter Druckzylinder



Custom Options Available

Intermediate capacities

Different flange locations



Options

Auto couplers

174 ▶



Sequence valves

152 ▶



Accessories

86 ▶



Collet-Lok®
swing cylinders

12 ▶



Important

For proper application, clamp force, pressures and timing, consult Enerpac for support.